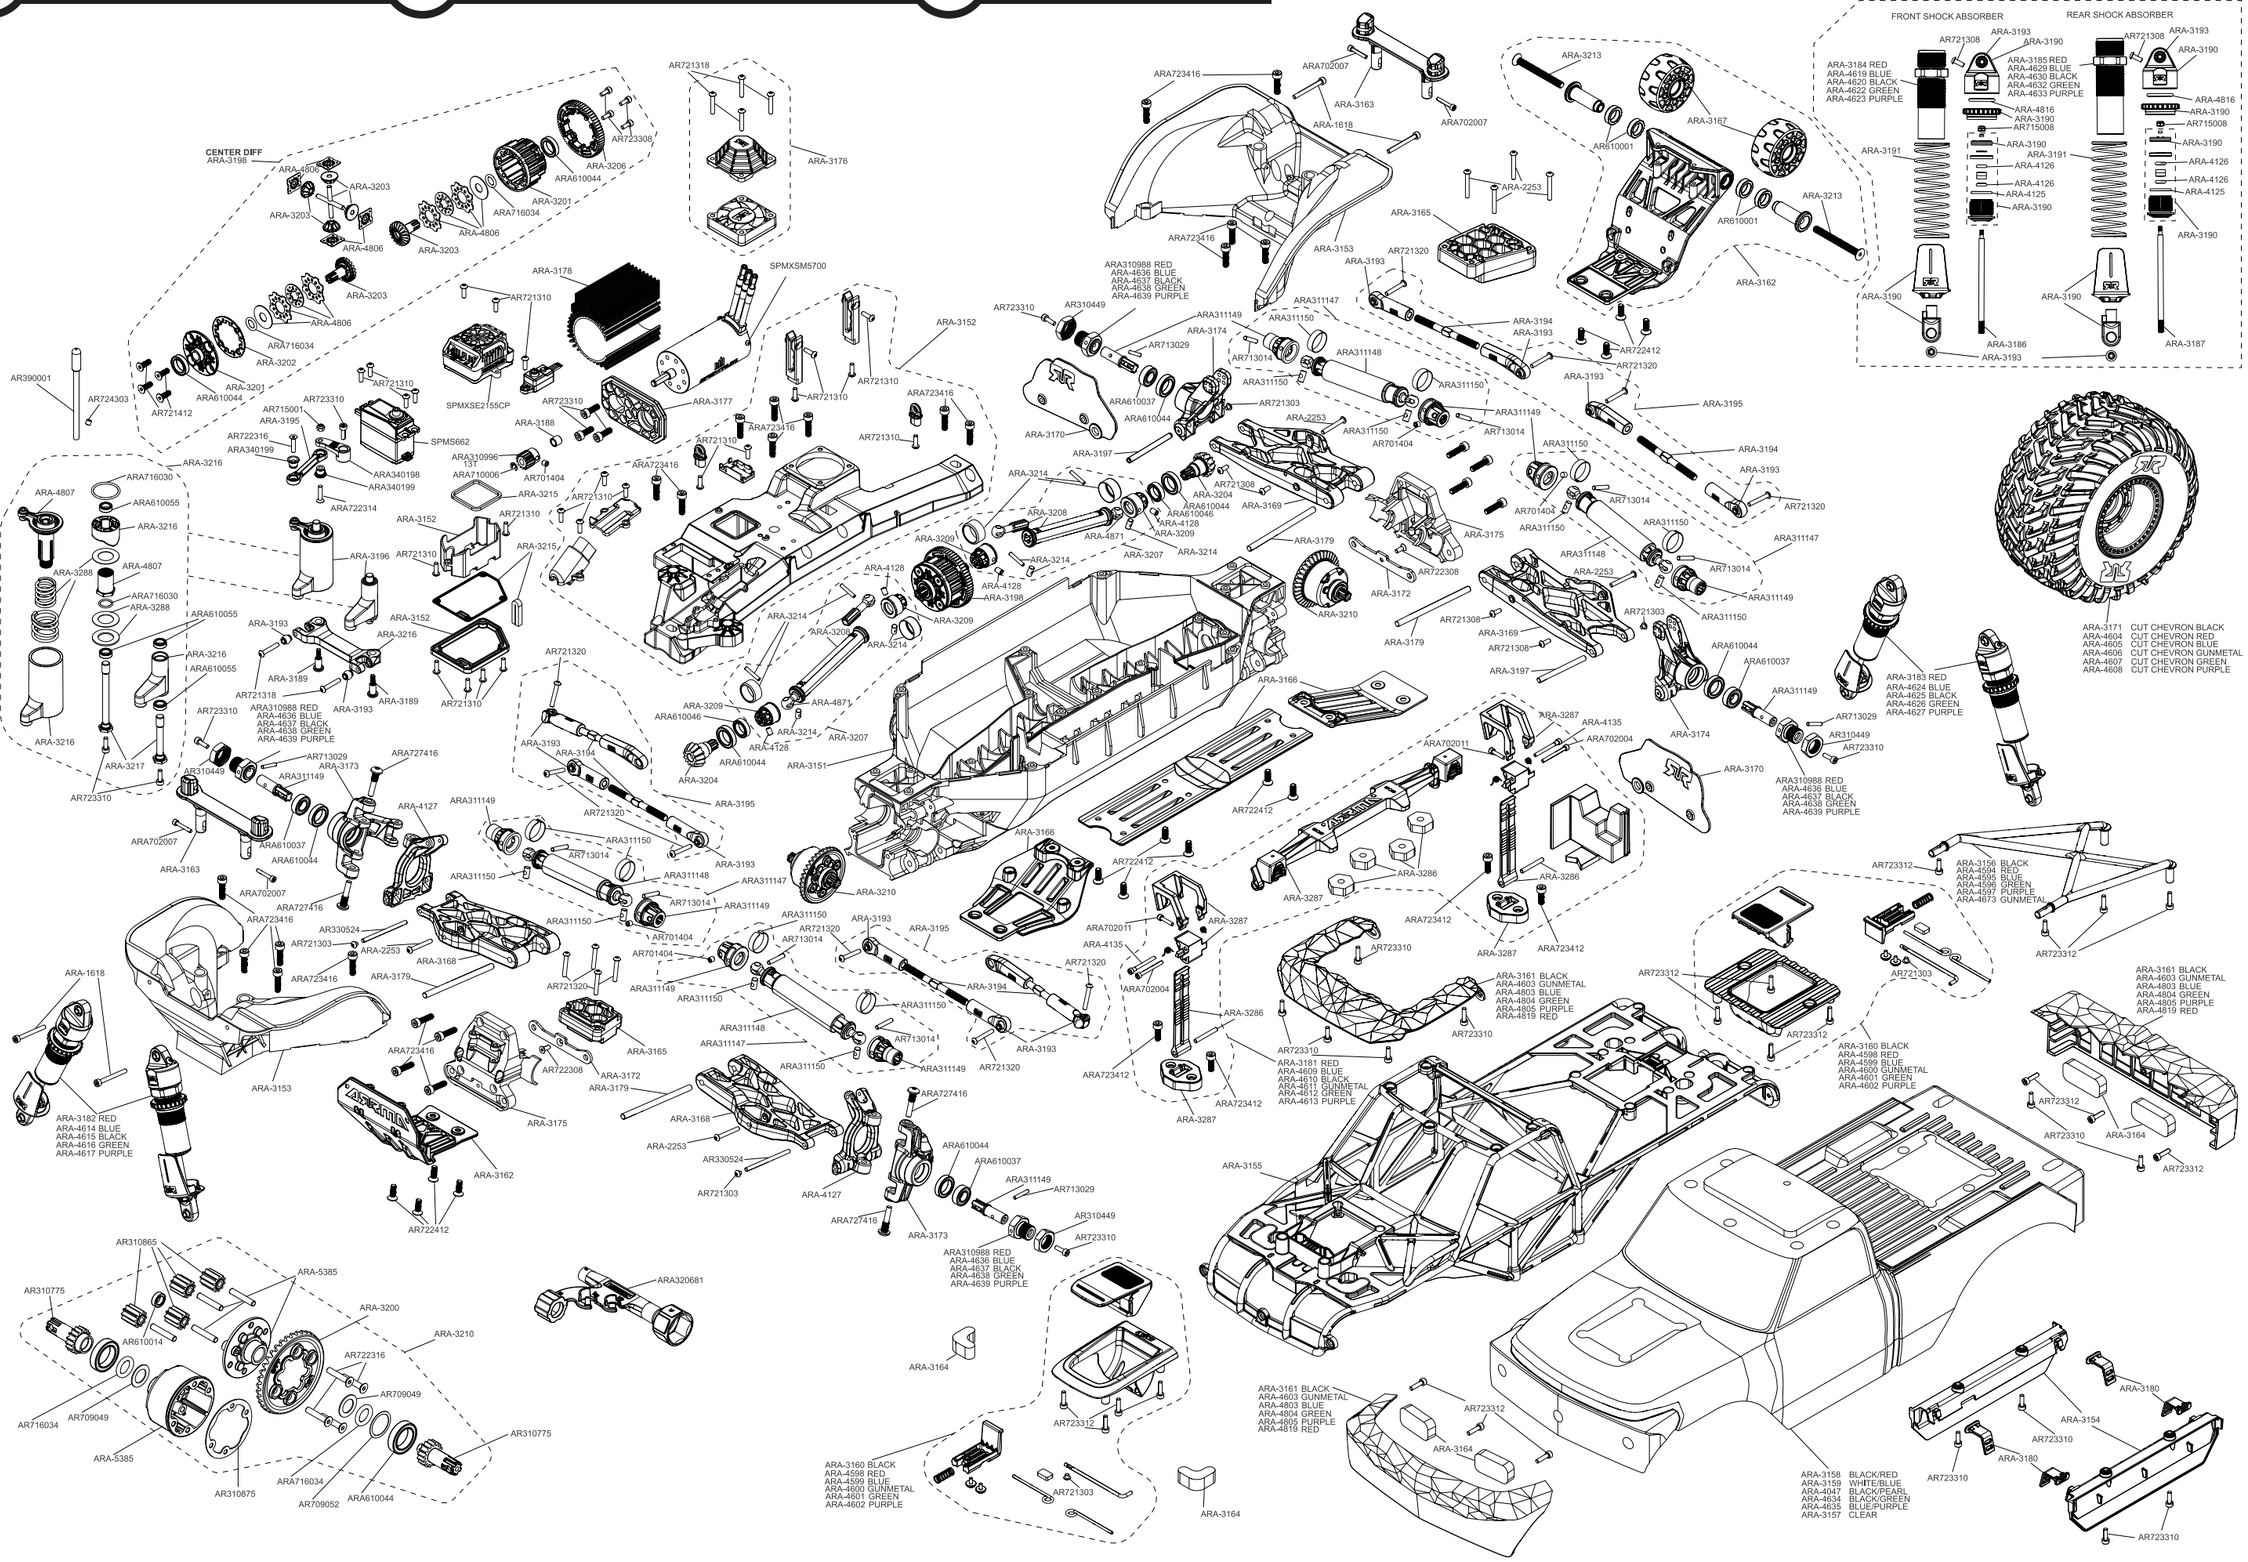
EN EXPLODED VIEW DE EXPLOSIONSANSICHT FR VUE ÉCLATÉE


CENTER DIFF
ARA-3198
ARA-4806
ARA-3203
ARA-3206
ARA610044
ARA-3201
ARA716034
AR723308
AR721318
ARA-3176
ARA-3178
AR721310
SPMXSM5700
SPMXSE2155CP
ARA-3177
ARA-3152
AR721310
ARA-3188
ARA723416
ARA-3202
ARA610044
ARA-3201
AR721412
AR724303
AR390001
AR723310
ARA715001
ARA-3195
AR722316
ARA340199
SPMS662
ARA340198
ARA722314
ARA-3216
ARA716030
ARA-4807
ARA610055
ARA-3288
ARA-3196
ARA-3193
ARA-3189
AR721318
ARA310988 RED
ARA-4636 BLUE
ARA-4637 BLACK
ARA-4638 GREEN
ARA-4639 PURPLE
ARA-3215
ARA-3214
ARA-3208
ARA-3209
ARA-4128
ARA-3198
ARA-4871
ARA-3207
ARA-3204
ARA610046
ARA-3151
ARA-3166
ARA-3210
ARA-3179
ARA-3172
AR722308
ARA-3175
ARA-3169
AR721308
ARA-3197
ARA-3170
ARA723416
AR702007
ARA-3163
ARA-1618
ARA-3153
ARA723416
ARA-3165
ARA-2253
AR721320
ARA-3213
AR610001
ARA-3167
ARA-3162
ARA-3193
ARA-3194
AR722412
ARA-3195
ARA311149
ARA311150
ARA311148
ARA311147
AR713014
AR701404
ARA-3174
AR713029
ARA610037
ARA610044
AR721303
ARA-3204
ARA-3214
ARA-3209
ARA-4128
ARA-3198
ARA-4871
ARA-3207
ARA-3214
ARA-3179
ARA-3210
ARA-3172
AR722308
ARA-3175
ARA-3169
AR721308
ARA-3197
ARA-3170


model-markt24.ch

EN HOW TO CHANGE THE PINION / MOTOR


DE SO WECHSELN SIE DAS RITZEL / DEN MOTOR

FR COMMENT CHANGER LE PIGNON / MOTEUR


1

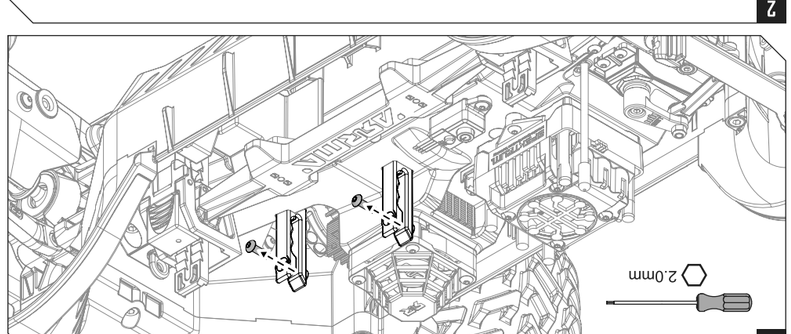


2

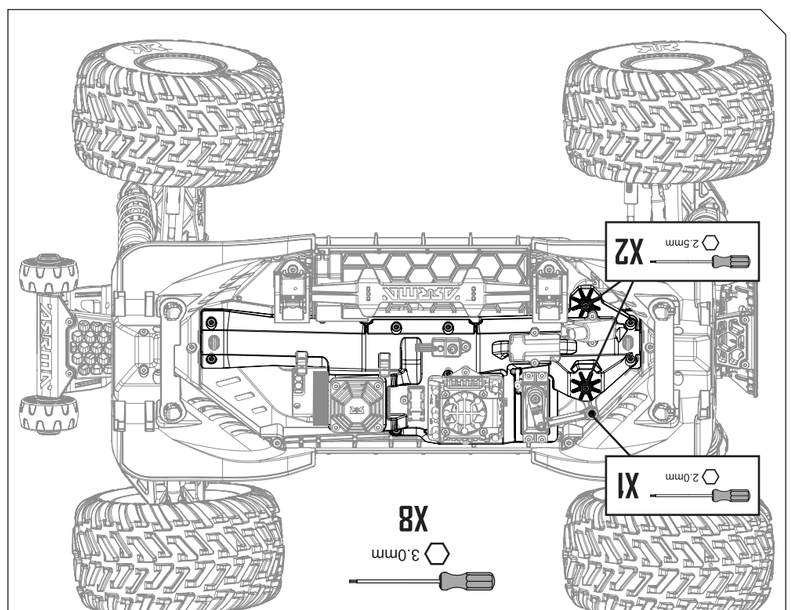


3

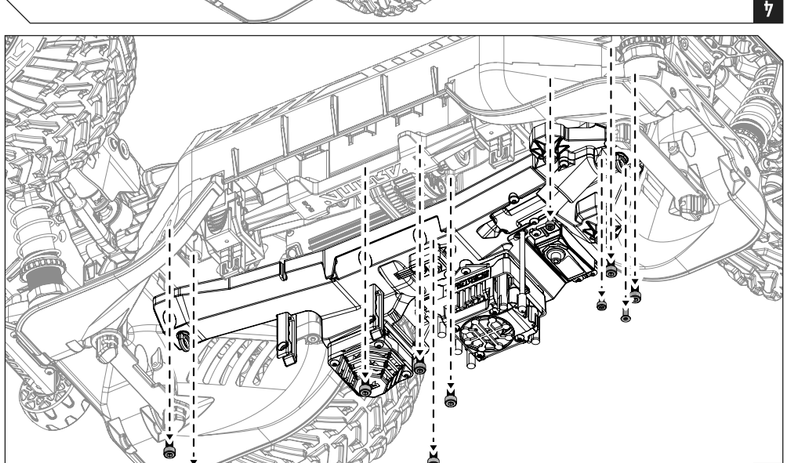


4

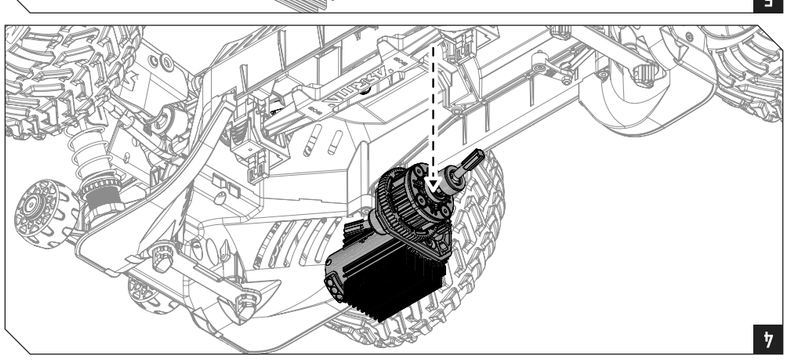

5

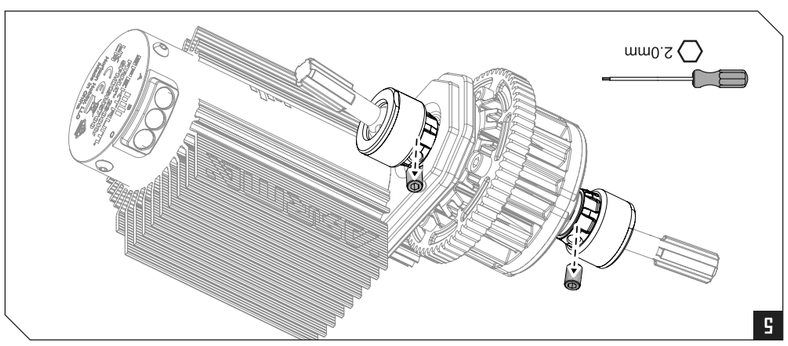

6

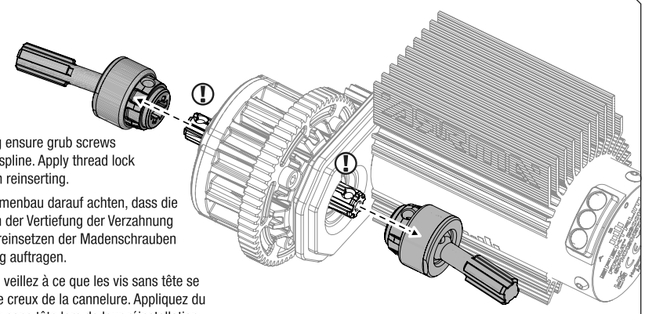


When reassembling ensure grub screws locate in detent on spline. Apply thread lock to grub screw when reinserting.


Beim Wiederzusammenbau darauf achten, dass die Madenschrauben in der Vertiefung der Verzahnung sitzen. Beim Wiedereinsetzen der Madenschrauben Schraubensicherung auftragen.

Lors du remontage, veillez à ce que les vis sans tête se positionnent dans le creux de la cannelure. Appliquez du frein-filet sur les vis sans tête lors de leur réinstallation.

7

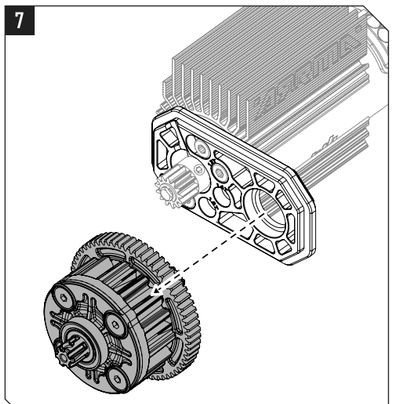


8

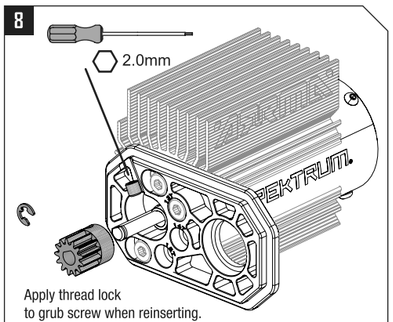

Apply thread lock to grub screw when reinserting.

Beim Wiedereinsetzen der Madenschrauben Schraubensicherung auftragen.

Appliquez du frein-filet sur les vis sans tête lors de leur réinstallation.

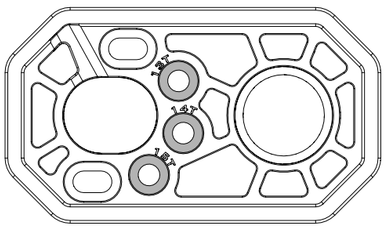


OPTIONAL PINION GEARS	
ARA310996	13T 0.8 Mod Safe-D5 CNC Steel Pinion Gear
ARA310997	14T 0.8 Mod Safe-D5 CNC Steel Pinion Gear
ARA310998	15T 0.8 Mod Safe-D5 CNC Steel Pinion Gear
ARA310999	16T 0.8 Mod Safe-D5 CNC Steel Pinion Gear
ARA311000	17T 0.8 Mod Safe-D5 CNC Steel Pinion Gear
ARA311001	18T 0.8 Mod Safe-D5 CNC Steel Pinion Gear
ARA311002	19T 0.8 Mod Safe-D5 CNC Steel Pinion Gear
ARA311003	20T 0.8 Mod Safe-D5 CNC Steel Pinion Gear
ARA311004	21T 0.8 Mod Safe-D5 CNC Steel Pinion Gear

Always fit screws into slotted holes - when using 13T, 14T or 15T Pinions add screw in relevant indexing hole for pre-set gear mesh. Fitting larger pinion gears increases electronic temperature and reduces runtime.

ARRMA

QUAKE 1/8 4S

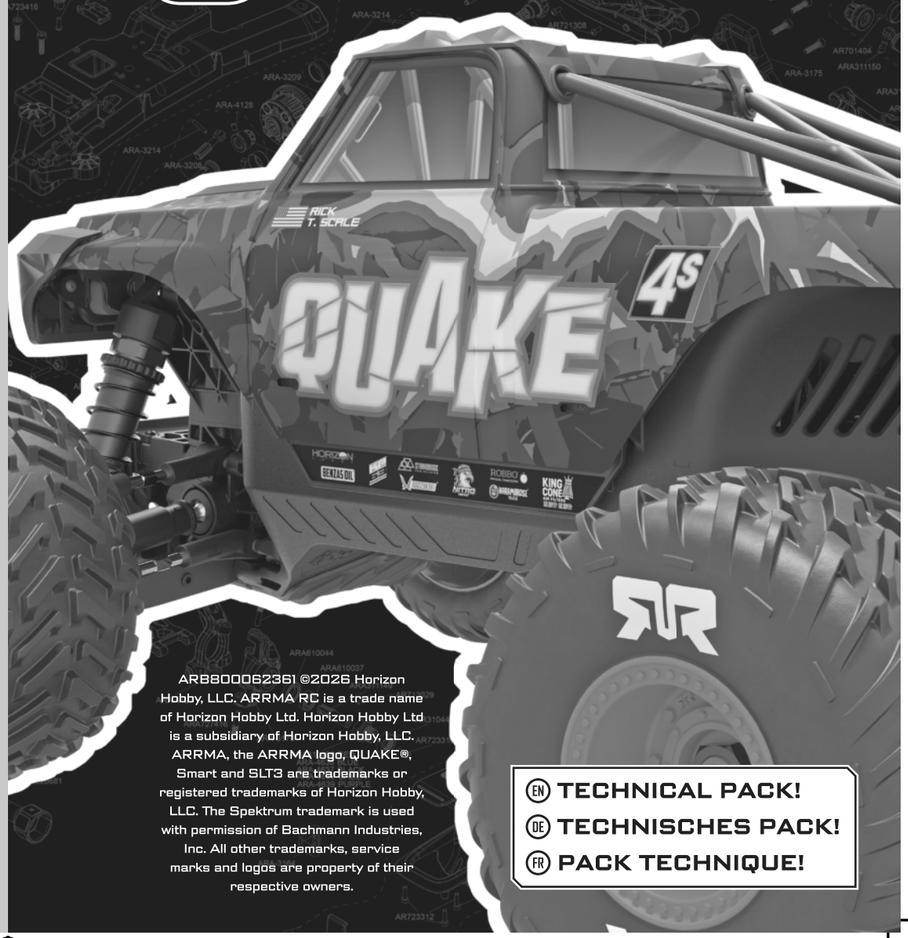

ARB800062361 ©2026 Horizon Hobby, LLC. ARRMA RC is a trade name of Horizon Hobby Ltd. Horizon Hobby Ltd is a subsidiary of Horizon Hobby, LLC. ARRMA, the ARRMA logo, QUAKE®, Smart and SLT3 are trademarks or registered trademarks of Horizon Hobby, LLC. The Spektrum trademark is used with permission of Bachmann Industries, Inc. All other trademarks, service marks and logos are property of their respective owners.

EN TECHNICAL PACK!

DE TECHNISCHES PACK!

FR PACK TECHNIQUE!